


Type 31



MECHANICAL SEALING SOLUTIONS

Metric

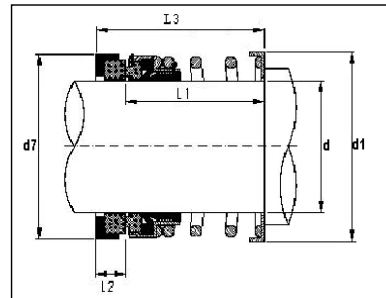

d	d1	d7	d7	L1	L2	L3
		A SEAT	B SEAT			
10	22.95	24.6	21	43.65	8.74	52.39
12	23.9	27.79	25.4	43.65	8.74	52.39
13	23.9	27.79	25.4	43.65	8.74	52.39
14	26.7	30.95	31.75	43.65	10.32	53.97
15	26.7	30.95	31.75	43.65	10.32	53.97
16	26.7	30.95	31.75	43.65	10.32	53.97
18	31.1	34.15	34.93	43.65	10.32	53.97
19	31.1	34.15	34.93	43.65	10.32	53.97
20	33.4	35.7	38.1	43.65	10.32	53.97
22	33.4	37.3	38.1	43.65	10.32	53.97
24	39.2	40.5	41.28	43.65	10.32	53.97
25	39.2	40.5	41.28	43.65	10.32	53.97
28	46.3	47.63	44.45	60.33	11.99	72.32
30	49.4	50.8	47.63	60.33	11.99	72.32
32	49.4	50.8	47.63	60.33	11.99	72.32
33	52.6	53.98	50.8	60.33	11.99	72.32
35	52.6	53.98	50.8	60.33	11.99	72.32
38	55.8	57.15	53.98	60.33	11.99	72.32
40	62.2	60.35	60.35	60.33	11.99	72.32
42	66	63.5	60.35	70.64	11.99	82.63
43	66	63.5	63.5	70.64	11.99	82.63
44	66	63.5	63.5	70.64	11.99	82.63
45	66	63.5	63.5	70.64	11.99	82.63
48	66.6	66.7	66.7	70.64	11.99	82.63
50	71.65	69.85	69.85	70.64	11.99	82.63
53	73.3	73.05	76.2	71	13.5	84.5
55	78.4	76.2	76.2	71	13.5	84.5
58	82	79.4	76.2	71	13.5	84.5
60	82	79.4	82.55	71	13.5	84.5
63	84.9	82.55	85.73	71	13.5	84.5
65	88.4	92.1	85.73	70	15.9	85.9
70	92.6	95.52	88.9	70	15.9	85.9
75	101.9	101.65	98.4	73	15.9	88.9

Operating limits :

Pressure : 10 bar
Temperature : -30 °C - 204 °C

Faces :

Carbon vs Ceramic
Silicon vs Silicon
Tungsten vs Tungsten

Elastomer :

Supplied in Viton as standard
Nitrile or EPDM available on request

Tel : 031-7052020

Fax : 031-7052022

Email : Wilfred@mechseals.co.za

All dimensions and limits are for guidance purposes only. Shaft dimension and medium are critical in determining correct limits. If in doubt contact the above.