


Type 52

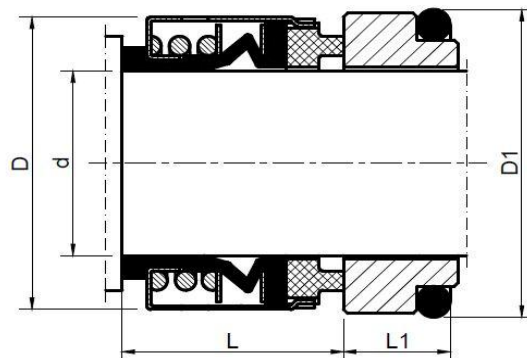

d	d1	L
14	24	23
16	26	23
18	32	24
20	34	24
22	36	24
24	38	26.7
25	39	27
28	42	30
30	44	30.5
32	46	30.5
33	47	30.5
35	49	30.5
38	54	32
40	56	32
43	59	32
45	61	32

d	d1	L
48	64	32
50	66	34
53	69	34
55	71	34
58	78	39
60	80	39
63	83	39
65	85	39
68	88	39
70	90	45.5
75	95	45.5
80	104	45
85	109	45
90	110	50
95	119	50
100	124	50

Operating limits :

Pressure : 35 bar
 Temperature : -30 °C - 204 °C (Viton)
 Speed : 15 m/s

Faces :

Carbon vs Ceramic
 Silicon vs Silicon
 Tungsten vs Tungsten

Elastomer :

Supplied in Viton as standard
 Nitrile and EPDM available on request

Tel : 031-7052020

Fax : 031-7052022

Email : Wilfred@mechseals.co.za

All dimensions and limits are for guidance purposes only. Shaft dimension and medium are critical in determining correct limits. If in doubt contact the above.